




INDUSTRIAS ASOCIADAS
INSTRUMENTACIÓN PARA LA INDUSTRIA

www.industriasociadas.com



60-Z Serie Smart Pocket Testers

pH | Conductivity | TDS | Salinity | Resistivity | ORP | Temp.



    @industriasociadas

Bogotá

PBX (1) 371 2929

Barranquilla

PBX (5) 316 1860

Cartagena


PBX (5) 642 9330

Cali


PBX (2) 369 0680

Medellin

PBX (4) 204 2310





01 Four Display Modes



Press MODE to switch to different parameters


Press + to enter calibration mode

Press [Data Management Icon] to enter data management

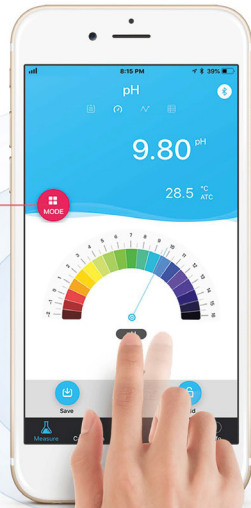

Simple Mode

Learn about calibration in formation
Manual Datalogger



Dial Mode

Vivid display of measuring values
Manual Datalogger



Graph Mode

Showing the trend of measurements
Auto. Timing Datalogger





Table Mode

Showing real-time measuring data
Auto. Timing Datalogger

02 Step-by-Step Operation Guide

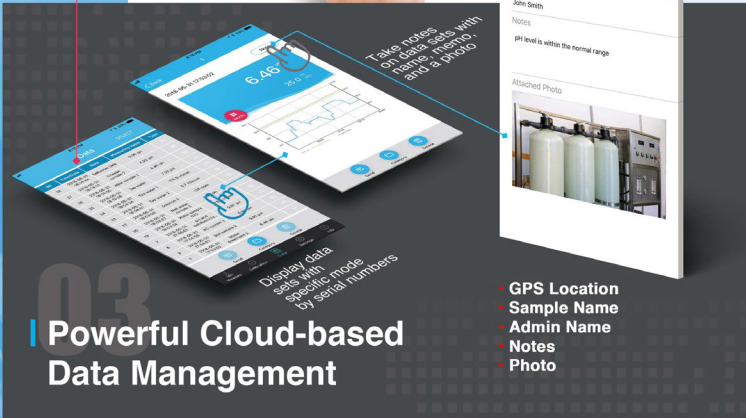


03 Powerful Cloud-based Data Management

- GPS Location
- Sample Name
- Admin Name
- Notes
- Photo


04 Smart Controlling

- Two-way controlling – can be used as a conventional tester without smart phones
- Smart operation reminders and self-diagnosis
- Electrode health condition reminder – helps you determine when to replace the electrode
- Instant data sharing via email on your phone
- Organize datasets into different folders at ease
- Alarm function – notify you of any values exceeding your preset range
- Manual/Automatic Hold function
- Calibration reminder




1 pH/ORP electrodes adopt double-junction structure – ideal for measuring complex or dirty solutions, and effectively extends electrode’s service life

Double-junction reference electrodes have two junctions and two reference solutions. Junction II will not contact test solutions so that junction II will not be contaminated by test solutions, which in turn maintains a stable electric potential. Additionally, reference solution I does not contain silver ion, which can significantly reduce junction clogging.




2 pH electrodes adopt blue gel inner solution – Say goodbye to air bubbles



The inner solutions in pH electrode’s glass bulbs are usually in liquid form, which could generate air bubbles from time to time when using. If not removed properly, the air bubble could cause meter’s malfunctioning. The 60-Z series pH electrodes adopt a unique blue gel inner solution, which would not flow and never generates air bubbles. The meter can function well even when being placed upside down.

3 Conductivity electrodes adopt firm platinum black coated sensors – accurate and durable

The platinum black coating process is the most effective method to reduce polarization of conductivity electrodes and extend the measuring range. However, the traditional platinum black coating is very soft. A slight wipe will damage the coating and cause the conductivity electrode to fail. 60-Z series conductive electrodes use a special process to make the platinum black coating firm and resistant to brushes, generating accurate performance in a wide measuring range.



4 Instrument’s Functions



The probe is easy to replace, saving money in the long run



IP67 waterproof and dustproof






Easy calibration with the meter standing in the case



Powered by 4*AAA batteries, up to 1000 hours of operation

5 3-Color Backlit Display

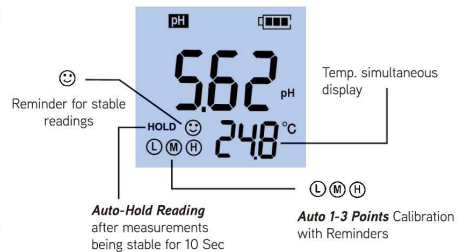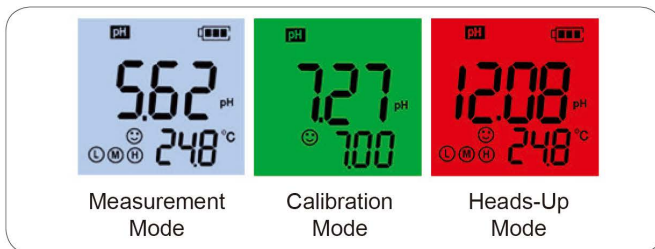



Technical Specifications

Parameter	Model	PC60-Z	PH60-Z	PH60S-Z	PH60F-Z	EC60-Z	ORP60-Z	
pH	Range	-2.00 to 16.00 pH					N/A	
	Accuracy	±0.01 pH ±1 digit						
	Calibration	1 to 3 points Auto. Calibration (recognizes 5 types of standards)						
mV (ORP)	Range	±1000 mV					N/A	±1000 mV
	Accuracy	±0.2% F.S						±0.2% F.S
Cond. (EC)	Range	0 to 20 mS/cm	N/A			0 to 20 mS/cm	N/A	
	Accuracy	±1% F.S				±1% F.S		
	Calibration	1 to 3 points Auto. Calibraiton				1 to 3 points Auto. Calibraiton		
TDS	Range	0 ppm to 10.0 ppt	N/A			0 ppm to 10.0 ppt	N/A	
	TDS Factor	0.4 to 1.0				0.4 to 1.0		
Salinity	Range	0 to 10.0 ppt	N/A			0 to 10.0 ppt	N/A	
Resistivity	Range	50Ω-cm to 20MΩ-cm				50Ω to 20MΩ		
Temp.	Range	0 to 50 °C (32 to 122 °F)						
Others	Application	Regular water solutions	Soft solid sampling	Flat surface & small-volume liquid	Regular water solutions			
	Temp. Compensation	Automatic 0 to 50 °C (32 to 122 °F)					N/A	
	IP Rating	IP67 Waterproof and Dustproof						
	Power Supply	DC3V AAA batteries x4 (up to 1000 hours of operation)						
	Compatible Probes	All	PH60-DE, PH60S-DE, PH60F-DE, ORP60-DE			EC60-DE	ORP60-DE	
	Alarm Function	Yes (customizable on ZenTest App)						
	Automatic Hold	Yes (5 to 20 seconds, customizable on ZenTest App)						
	Calibration Reminder	Yes (by hours/days, customizable on ZenTest App)					N/A	
ZenTest App (Bluetooth, iOS & Android)	Four display modes	Yes						
	Cloud data management	Yes						
	Smart self-diagnosis	Yes						
	Step-by-step calibration guide	Yes						



Bogotá

PBX (1) 371 2929

Barranquilla

PBX (5) 316 1860

Cartagena

PBX (5) 642 9330

Cali

PBX (2) 369 0680

Medellin

PBX (4) 204 2310



INDUSTRIAS ASOCIADAS

INSTRUMENTACIÓN PARA LA INDUSTRIA

www.industriasasociadas.com



- ◆ PC60-Z Smart pH/Cond. Tester
- ◆ PH60-Z Smart pH Tester
- ◆ PH60S-Z Smart Spear pH Tester
- ◆ PH60F-Z Smart Flat pH Tester
- ◆ ORP60-Z Smart ORP Tester
- ◆ EC60-Z Smart Conductivity Tester

Complete Kit

Probe Features						
Probe Model	PH60-DE	PH60F-DE	PH60S-DE	ORP60-DE	EC60-E	PC60-DE
Default Meter	PH60-Z	PH60F-Z	PH60S-Z	ORP60-Z	EC60-Z	PC60-Z
Other Compatible Meters	PH60F-Z PH60S-Z PC60-Z	PH60-Z PH60S-Z PC60-Z	PH60-Z PH60F-Z PC60-Z	PH60-Z PH60F-Z PH60S-Z PC60-Z	PC60-Z	/
Probe Type	Glass Bulb	Flat sensor	Spear sensor	Platinum needle	Platinum Black	pH+Cond.
Applications	Regular water Solution pH Test	Surface and small-volume pH Test	Soft solid sampling pH Test	ORP Test	Conductivity/TDS/Salinity Test	pH/Conductivity TDS/Salinity Test

[@industriasasociadas](https://www.instagram.com/industriasasociadas)

Bogotá

PBX (1) 371 2929

Barranquilla

PBX (5) 316 1860

Cartagena

PBX (5) 642 9330

Cali

PBX (2) 369 0680

Medellin

PBX (4) 204 2310